600PSR

Phase Sequence Relay

DIN 17.5mm

Features :

- 3Ø - 3 Wire Input
- Monitors Phase Sequence, Phase Failure, Phase Asymmetry
- LED Indication : Relay ON
- Slim, Space Saving Design
- DIN Rail Mount

Certification : CE

Display Specifications

Type	Analog
No. of LED	1

LED Indication Chart

Condition	'R' LED
Nominal Condition	ON
Fault Condition	OFF

Input Specifications

Accuracy	±3% of F.S. (F.S. = Full Scale)
Reset	Auto reset on removal of fault condition

Output Specifications

Relay Contact	1 C/O (SPDT)
Relay Rating	NO / 5A, NC / 3A@250V AC

Auxiliary Supply Specifications

Operating Voltage	154 to 500V AC (L - L)
Power Consumption	20VA max

Functional Specifications

Phase Failure Trip	3 Phase voltage <154V AC (L - L)
Phase Asymmetry	30V fixed
Phase Sequence	Yes
Hysteresis	6V
Trip Accuracy	±10V
Response Time	200 msec max
Power On Delay	200 msec

Environmental Specifications

Temperature	Operating Temperature : 0° to 50°C Storage Temperature : -20° to 75°C
Humidity (non-condensing)	95% RH
Pollution Degree	
For PCB	2
For Product	3
Degree of Protection Devices	IP20

Mechanical Specifications

Mounting	DIN Rail
Weight	62gms
Screw Tightening Torque	0.6 NM

Dimensions

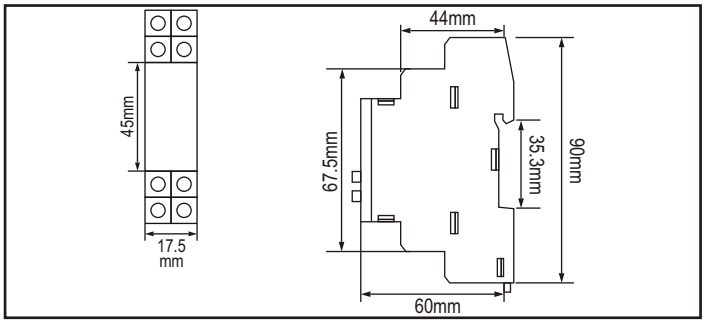

Terminal Connection

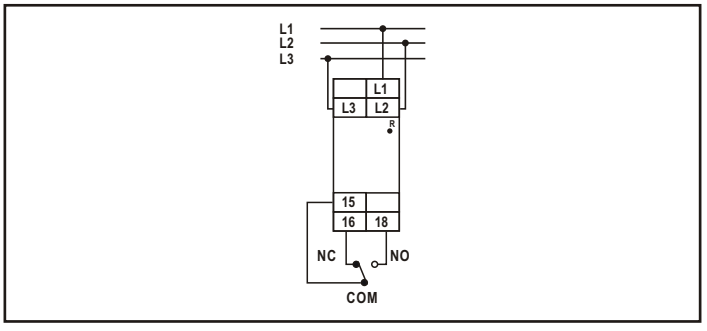


ase reversed
ailure trip
T
T
Power on delay
Response time
Response time