## Features :

- **Single Set Point**
- **On delay/ Interval**
- **2 C/O SPDT**
- **6 Time Ranges**
- **Down Counting**

**72 x 72mm** **96 x 96mm**

## Technical specifications

| | | |
|---|---|---|
| Display | 3 digits, 7 segment LED | |
| LED Indications | Relay ON | |
| Accuracy | ±0.05% of F.S. or 50msec | |
| Start input | Pulse start | |
| Contact rating | Relay: NO: 10A 250 VAC/ 24 VDC<br>NO/ NC: 5A/ 5A 250 VAC/ 24VDC | |
| Relay contact | 2X SPDT | |
| Auxiliary supply | ON delay/ Interval | |
| Time ranges | 0 - 9.99sec, 0 - 99.9sec, 0 - 999sec, 0 - 99.9min, 0 - 999min, 0 - 99.9hr | |
| Resolution | 0.01sec | |
| Counting direction | Down | |
| Set point | 1 | |
| Time setting | Pushwheel | |
| Reset | Front, Remote, On power interruption | |
| Memory retention | No | |
| Supply voltage | 90 to 270 VAC/ DC (50/ 60Hz) and 24 VDC | |
| Temperature | Operating: 0 to 50°C ; Storage: - 5 to 55°C | |
| Humidity (non - condensing) | 95% RH | |
| Mounting | Panel mount | |
| Weight | 325 gms | 350 gms |

## Terminal connections

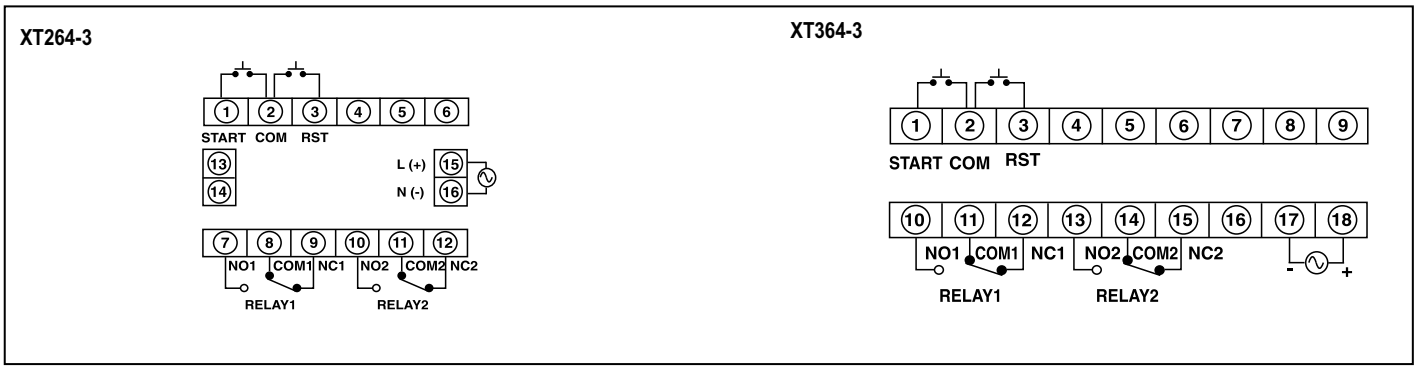


## Dimensions (All are in mm)

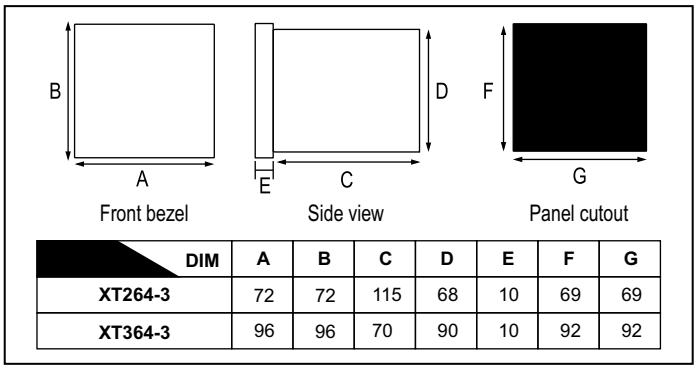


| DIM | A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| XT264-3 | 72 | 72 | 115 | 68 | 10 | 69 | 69 |
| XT364-3 | 96 | 96 | 70 | 90 | 10 | 92 | 92 |

## Timing diagrams

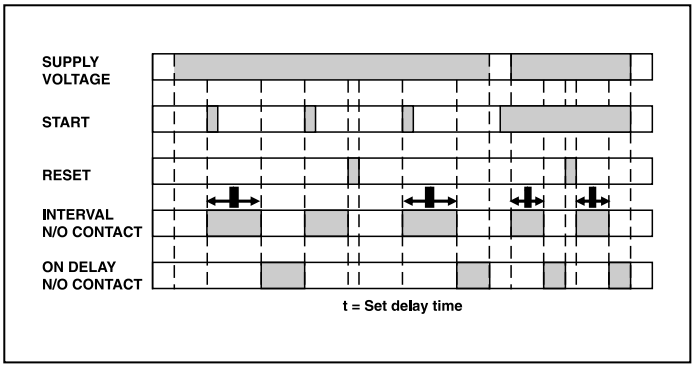


## Ordering information

| | | |
|---|---|---|
| **XT264-3** | 90 to 270 VAC/ DC | - - - |
| **XT364-3** | 90 to 270 VAC/ DC | - - - |