800S

22.5mm Din Rail Timer

DIN 22.5mm

Features :

- Lowest cost, Single Function
- LED Indications : Power ON, Relay ON
- Finger safe Terminals

Display Specifications

LED Indications	Power ON, Relay ON

Input Specifications

Accuracy	Setting : ± 5% of full scale. Repeat : ± 0.5% or 50msec

Output Specifications

Relay Contact	1 C/O SPDT
Contact Rating	5A @ 250V AC / 24V DC, resistive

Functional Specifications

Modes	ON delay
Time Ranges	60sec
Reset	On power interruption Reset time < 100msec

Auxiliary Supply Specifications

Supply Voltage	230V AC, 415V AC (50 / 60 Hz)

Environmental Specifications

Temperature	Operating : 0 to 50°C Storage : -5 to 50°C
Humidity (non - condensing)	95% RH

Mechanical Specifications

Mounting	DIN Rail Mount
Weight	100gms

Dimensions

800S

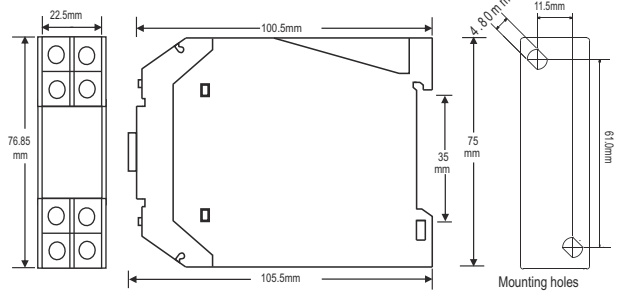

Terminal Connections

800S



Timing Diagram

Function : ON delay (A)



Ordering Information

Product Code	Supply Voltage
800S-1-ON-60S-230	230V AC
800S-1-ON-60S-415	415V AC