





⚠ Caution:

1. Please check polarity of DC power input before connecting.
2. **Load connection :**
 - I. For load current less than 0.5A.



- II. For bigger loads, use interposing relay/contactor .



Snubber Part No.: APRC-01.

Note : Use snubber as shown above to increase the life of internal relay

3. Change the settings of modes, time range, time scale or division knobs only when the unit is powered off.
4. Fuse protection : The equipment does not have any built-in fuse. Fuse rating of 275VAC/1A is recommended.

EMC Installation Guidelines:

1. Use proper input power cables with shortest connections and twisted type.
2. Layout of connecting cables must be away from any internal EMF source

Mechanical Installation Guidelines:

1. The equipment uses 8-Pin Relay Socket with a clamp for T-type Din-Rail.
 2. Ensure unit is correctly fitted on to the 8-Pin Socket.
 3. Slide the equipment using appropriate tools and holding the unit from the front side, slide it over the fixed rail.
- **Malfunction may occur if above instructions are not followed**

SPECIFICATIONS

Time Setting Range : 0.05sec - 300hour
 Supply Voltage : 20-240VAC / DC, 50/60Hz
 Power Consumption : Max 5VA
 Contact type : 2 SPDT (1C/O)
 Contact capacity : 250VAC, 6A resistive load
 Electrical life of relay : 100,000 operations
 Mechanical life of relay : 10,000,000 operations
 Accuracy Setting : ±5% of full scale or ±50ms (whichever is greater)
 Repeat : ±0.5% ±50ms (whichever is greater)

Environmental conditions :




Operating : 0 to 50°C
 Storage : -20 to 75°C
 Humidity : 95%RH
 Pollution degree : 2

Mechanical specification :


Mounting : Plug
 Weight : 100 gms

Compliance **CE**

DIMENSIONS (All are in mm.)



FRONT PANEL DESCRIPTION



1. Red LED indicates Relay R1 & Green LED indicates Relay R2
2. Knob for Operating mode Selection
3. Red LED indicates Power ON
4. Knob for time selection (The marking 1 to 10 represents timing in proportion to full scale time range)
5. Knob for time range selection
6. Knob for time scale selection


TIME SPECIFICATION

Time range	Time unit	Time setting range
0.5	S	0.05 to 0.5 sec
1		0.1 to 1 sec
3		0.3 to 3 sec
5		0.5 to 5 sec
10		1 to 10 sec
0.5	M	0.05 to 0.5 min
1		0.1 to 1 min
3		0.3 to 3 min
5		0.5 to 5 min
10		1 to 10 min
0.5	H	0.05 to 0.5 hour
1		0.1 to 1 hour
3		0.3 to 3 hour
5		0.5 to 5 hour
10		1 to 10 hour
0.5	10H	0.5 to 5 hour
1		1 to 10 hour
3		3 to 30 hour
5		5 to 50 hour
10		10 to 100 hour
0.5	30H	1.5 to 15 hour
1		3 to 30 hour
3		9 to 90 hour
5		15 to 150 hour
10		30 to 300 hour

Note : Time range x Time unit = Maximum time setting range


TERMINAL CONNECTIONS

8-PIN PLUG-IN TYPE

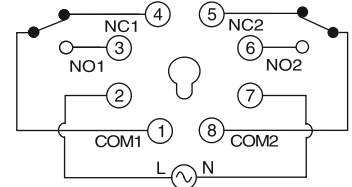


FUNCTIONS


A ON Delay




B Pulse Output with instantaneous limit




C ON Delay with Instantaneous limit




D Interval with Instantaneous limit



E Cyclic Equal OFF First




F Cyclic Equal OFF First with Instantaneous limit




t: Set Time, t>t-a


G Cyclic Equal ON First




H Cyclic Equal ON First with Instantaneous limit



I Star delta with 50ms pause time



J Star delta with 100ms pause time



Note :

- When using mode E, F, G & H, setting a very small time may not guarantee proper operation.
Set time more than 100ms.
- When using mode I & J : t = Run Up Time
t1 = Pause Time

ORDER CODE INFORMATION

Product	Supply	Certification
55MF-P8	20-240 VAC/DC 50/60Hz	CE

(Specifications are subject to change, since development is a continuous process.)

Selec Controls Pvt. Ltd., India

Factory Address :
EL-27/1, Electronic Zone, TTC Industrial Area,
MDC, Mahape, Navi Mumbai - 400 710, INDIA.
Tel. No. : +91-22-28476443 / 1882
Fax No. : +91-22-28471733 | Toll free : 1800 227 353
Website: www.selec.com | Email: sales@selec.com