





### ⚠ Caution:

- While connecting START, INHIBIT, RESET please make sure to use terminal 2 as a common terminal (as shown in connection diagram). Using terminal 10 as a common terminal, may result in inappropriate operation.
- Please check polarity of DC power input before connecting.
- Load connection :**
  - For load current less than 0.5A.



- For bigger loads, use interposing relay/contactors .



Snubber Part No.: APRC-01.

Note : Use snubber as shown above to increase the life of internal relay

- Change the settings of modes, time range, time scale or division knobs only when the unit is powered off.
- Fuse protection : The equipment does not have any built-in fuse. Fuse rating of 275VAC/1A is recommended.

### EMC Installation Guidelines:

- Use proper input power cables with shortest connections and twisted type.
- Layout of connecting cables must be away from any internal EMF source

### Mechanical Installation Guidelines:

- The equipment uses 11-Pin Relay Socket with a clamp for T-type Din-Rail.
- Ensure unit is correctly fitted on to the 11-Pin Socket.
- Slide the equipment using appropriate tools and holding the unit from the front side, slide it over the fixed rail.

- Malfunction may occur if above instructions are not followed

### SPECIFICATIONS

Time Setting Range : 0.05sec - 300hour

Supply Voltage : 20-240VAC / DC,  
50/60Hz

Power Consumption : Max 5VA

Input Power Rating : 20-240V AC/DC,  
(Start, Inhibit, Reset) 50/60Hz

Min input signal time : 50ms

(Start, Inhibit, Reset)

Reset time : 100ms

Contact type : 2 SPDT (1C/O)

Contact capacity : 250VAC,  
6A resistive load

Electrical life of relay : 100,000 operations

Mechanical life : 10,000,000

operations

Accuracy Setting : ±5% of full scale or  
±50ms (whichever is greater)

Repeat : ±0.5% ±50ms  
(whichever is greater)

### Environmental conditions :

Operating : 0 to 50°C

Storage : -20 to 75°C

Humidity : 95%RH

Pollution degree : 2


### Mechanical specification :

Mounting : Plug


Weight : 100 gms

Compliance **CE**

### DIMENSIONS (All are in mm.)




Front



Clamp

Panel Cutout




### TIME SPECIFICATION

| Time range | Time unit | Time setting range |
|------------|-----------|--------------------|
| 0.5        | S         | 0.05 to 0.5 sec    |
| 1          |           | 0.1 to 1 sec       |
| 3          |           | 0.3 to 3 sec       |
| 5          |           | 0.5 to 5 sec       |
| 10         |           | 1 to 10 sec        |
| 0.5        | M         | 0.05 to 0.5 min    |
| 1          |           | 0.1 to 1 min       |
| 3          |           | 0.3 to 3 min       |
| 5          |           | 0.5 to 5 min       |
| 10         |           | 1 to 10 min        |
| 0.5        | H         | 0.05 to 0.5 hour   |
| 1          |           | 0.1 to 1 hour      |
| 3          |           | 0.3 to 3 hour      |
| 5          |           | 0.5 to 5 hour      |
| 10         |           | 1 to 10 hour       |
| 0.5        | 10H       | 0.5 to 5 hour      |
| 1          |           | 1 to 10 hour       |
| 3          |           | 3 to 30 hour       |
| 5          |           | 5 to 50 hour       |
| 10         |           | 10 to 100 hour     |
| 0.5        | 30H       | 1.5 to 15 hour     |
| 1          |           | 3 to 30 hour       |
| 3          |           | 9 to 90 hour       |
| 5          |           | 15 to 150 hour     |
| 10         |           | 30 to 300 hour     |


Note : Time range x Time unit = Maximum time setting range

### TERMINAL CONNECTIONS

#### 11-PIN PLUG-IN TYPE




## FRONT PANEL DESCRIPTION




1. Red LED indicates Relay R1 & Green LED indicates Relay R2
2. Knob for Operating mode Selection
3. Red LED indicates Power ON
4. Knob for time selection  
(The marking 1 to 10 represents timing in proportion to full scale time range)
5. Knob for time range selection
6. Knob for time scale selection

## FUNCTIONS

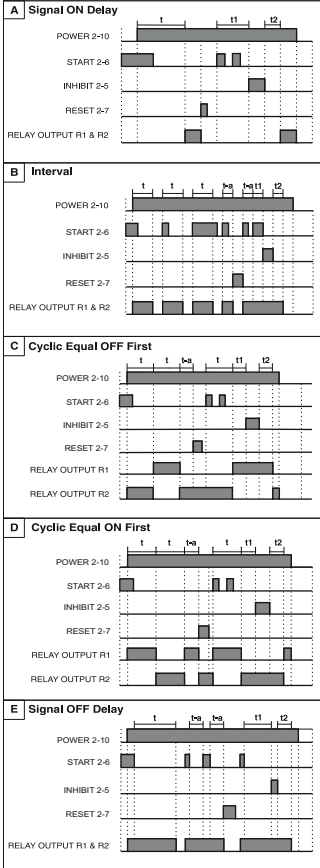

t: Set Time, t=t1+t2, t>t-a

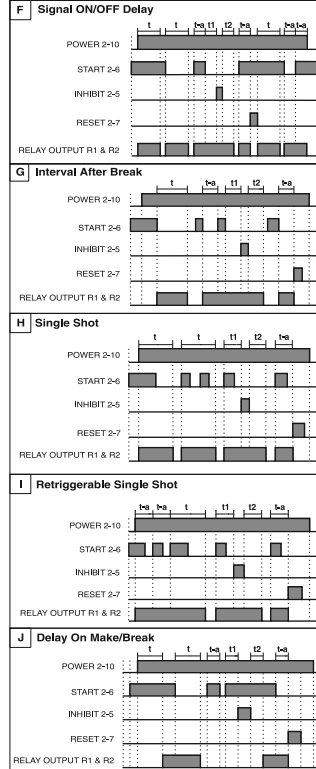

### Note :

1. If START terminal is closed, time cycle (t) will start.
2. If timer is cut or RESET terminal is closed, the timer will be reset.
3. If INHIBIT terminal is closed during a time-cycle, the time will be stopped until INHIBIT terminal is opened.
4. When using mode C and D, setting a very small time may not guarantee proper operation. Set time more than 100ms.

## ORDER CODE INFORMATION

| Product  | Supply                   | Certification |
|----------|--------------------------|---------------|
| 55MF-P11 | 20-240 VAC/DC<br>50/60Hz | CE            |

(Specifications are subject to change, since development is a continuous process.)

### Selec Controls Pvt. Ltd., India

Factory Address :  
EL-27/1, Electronic Zone, TTC Industrial Area,  
MDC, Mahape, Navi Mumbai - 400 710, INDIA.  
Tel. No. : +91-22-28476443 / 1882  
Fax No. : +91-22-28471733 | Toll free : 1800 227 353  
Website: www.selec.com | Email: sales@selec.com