



**Features:**

- Terminal Output
- Accuracy : Class 0.5 to 5

**Input / Output Specifications**

Rated primary rating	30A to 1600A
Rated secondary output	5A


**Technical Specifications**

Rated burden	1.5VA to 10VA
Class of accuracy	0.5 to 5
Thermal Nominal Continuous Rated Current (I <sub>th</sub> )	120% of I <sub>n</sub>
Thermal short circuit current (I <sub>th</sub> )	I <sub>th</sub> =60 X I <sub>n</sub> for 1 sec
Instrument security factor	FS<5
Max operating voltage (U <sub>m</sub> )	720V maximum
Isolation test voltage	3kV AC 1 min
Nominal rated frequency	AC 50Hz
Frequency	50/60Hz

**Standard**

Applicable standard	IEC 61869-2
---------------------	-------------

**Dimension (All are in mm)**

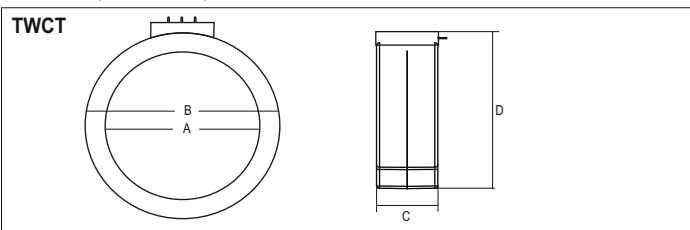

PRODUCT	A	B	C	D
TWCT-T-D35	35	70	45	80
TWCT-T-D55 150/5 A	55	90	35	100
TWCT-T-D55	55	90	25	100
TWCT-T-D65	65	95	30	105
TWCT-T-D110	110	35	35	145
TWCT-T-D120	120	155	25	165

**Ordering Information**

PRODUCT CODE	WIRE APERTURE In mm	CURRENT RATIO	BURDEN IN VA	ACCURACY CLASS
TWCT-T-D35 30/5 A VA 1.5 CL 5	DIA 35	30/5	1.5	5
TWCT-T-D35 50/5 A VA 5 CL 5	DIA 35	50/5	5	5
TWCT-T-D35 75/5 A VA 5 CL 5	DIA 35	75/5	5	5
TWCT-T-D35 100/5 A VA 5 CL 1	DIA 35	100/5	5	1
TWCT-T-D35 150/5 A VA 5 CL 1	DIA 35	150/5	5	1
TWCT-T-D55 150/5 A VA 5 CL 1	DIA 55	150/5	5	1
TWCT-T-D55 200/5 A VA 5 CL 1	DIA 55	200/5	5	1
TWCT-T-D55 250/5 A VA 5 CL 1	DIA 55	250/5	5	1
TWCT-T-D55 300/5 A VA 5 CL 1	DIA 55	300/5	5	1
TWCT-T-D55 400/5 A VA 5 CL 1	DIA 55	400/5	5	1
TWCT-T-D55 500/5 A VA 5 CL 1	DIA 65	500/5	5	1
TWCT-T-D65 600/5 A VA 5 CL 1	DIA 65	600/5	5	1
TWCT-T-D110 800/5 A VA 10 CL 0.5	DIA 110	800/5	10	0.5
TWCT-T-D110 1000/5 A VA 10 CL 0.5	DIA 110	1000/5	10	0.5
TWCT-T-D120 1000/5 A VA 10 CL 0.5	DIA 120	1000/5	10	0.5
TWCT-T-D120 1200/5 A VA 10 CL 0.5	DIA 120	1200/5	10	0.5
TWCT-T-D120 1600/5 A VA 10 CL 0.5	DIA 120	1600/5	10	0.5