

Certifications : C € RoHS

# **Features:**

- EXP FLEX 2M is an Expansion Module used in conjunction with specific PLCs (With RS485 Master Communication)
- Use to Enhance I / O Configuration
- Any Flexys I / O Card can be configured (One per Device)
- Upto 7 numbers of EXP FLEX 2M Devices can be connected to a Master PLC
- Two Baudrate selections 19200 & 115200 bps
- RS485 Slave IN & OUT Separate Terminals (For easy loop & wiring)
- · 4 LED Indicators
- Four Way DIP Switch for Slave ID & Baudrate selection

## **Electrical Specification**

Supply voltage	24V DC ±10%
Power consumption	2.5W
Reverse Polarity Protection	Yes
Isolation between Power &	
Communication Circuit	No

## **Functional Specifications**

Response time	100ms to 2 sec based on number of EXP FLEX
	2M Devices Configured + I / O Card type

#### **DIP Switch Selection**

Slave ID	DIP Switch			
Slave ID	1	2	3	4
NA	Х	OFF	OFF	OFF
1		OFF	OFF	ON
2		OFF	ON	OFF
3		OFF	ON	ON
4		ON	OFF	OFF
5		ON	OFF	ON
6		ON	ON	OFF
7		ON	ON	ON
Baud Rate				
19200 bps	OFF	Х	X	X
115200 bps	ON	X	X	Х

## **LED Display**

LED Display	LED Color	Indication
Power LED (PWR)	Green	Always On when Device is powered
Receive LED (Rx)	Green	Blinks when EXP FLEX 2M Device receives RS485 command from Master
Transmit LED (Tx)	Red	Blinks when EXP FLEX 2M Device transmits RS485 response to Master
		On - When I / O Card is not connected
Error LED (Err) Re	Pod	Flashing - 2 sec ON, 0.3 sec OFF - when I/O Card is mismatched *1
	Reu	Flashing - 0.3 sec ON, 0.3 sec OFF - when No Master Communication is received for 6 secs
		OFF - Successful Operation

 $<sup>^{\</sup>star 1}$  : When configured I/O Card in SELPRO software is different from connected I / O card EXP FLEX 2M


#### Communication

Communication Port	RS485 Slave
Communication Protocol	Proprietary
Baud Rate	19200 and 115200 bps (user configurable) (Default + 19200 bps)
Fixed Settings	Parity = None (N), Stop bits = 1, Data length = 8


## **Environmental Specifications**

Temperature	Operating: 0 to 50°C Storage: -20 to 60°C
Humidity (non-condensing)	10% to 95% RH

## Dimensions (in mm)

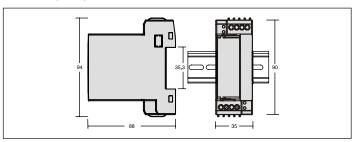

## **Terminal Connection**

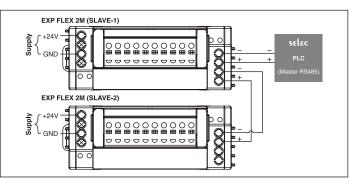

# **Ordering Information**

Product Code	Description	Certification
EXP FLEX 2M	Expansion Slot – Flexys IO Cards	(€ RoHS