

DIN 22.5mm

Features:

True Power OFF DelayLED Indications : Power ON

• Finger Safe Terminals

Display Specifications

LED Indications Power ON

Input Specifications

Accuracy	Setting: ±10% of F.S.
	Repeat: ± 2% or 100msec whichever is greater
	(F.S. = Full Scale)

Output Specifications

Relay Contact	2 C/O DPDT
Contact Rating	2.5A @ 250V AC / 28V DC, Resistive load ±10% for both V & I

Functional Specifications

Modes	True Power OFF Delay
Time Ranges	180sec
Reset	On power interruption, Reset time < 100msec

Auxiliary Supply Specifications

Supply Voltage	110 to 240V AC / DC (50 / 60Hz) -15% to 10% tolerance
Power Consumption	2.5VA max


Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH


Mechanical Specifications

Mounting	DIN Rail Mount
Weight	115gms
	3


Dimensions

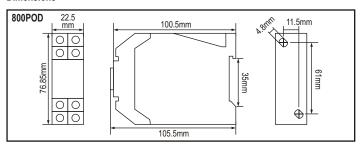

Terminal Connections

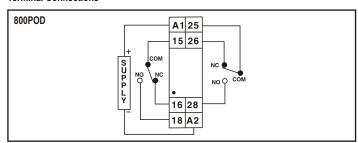

Timing Diagram

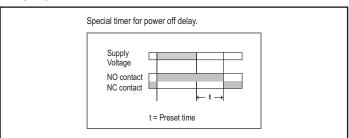

Ordering Information

Product Code	Supply Voltage
800POD-180S	110 to 240V AC / DC

www.selec.com