

RLYMD-1-S4-1CO-24VDC



69 x 87 x 78mm

RLYMD-2-S8-1CO-24VDC



138 x 87 x 78mm

Certifications : **CE RoHS**

Features :

- Single Changeover
- LED & Free Wheeling Diode across Coil
- Jumpers for Coil Looping
- Reverse Polarity Protection


Display Specifications

Contacts	1 C/O
No. of Channels	4, 8
RELAY	
Nominal Coil Voltage	24V DC
Must Operate Voltage	18V DC
Max Coil Voltage	33V DC
Coil Current Per Channel	46mA
Operate (set) Time	15ms Max
Release(reset) Time	5ms Max
Endurance	Mechanical : 10000000 ops Electrical : 100000 ops
Dielectric Strength	Coil to contact : 5000VAC for 1 minute Open contacts : 1000VAC for 1 minute
Contact Rating	10A@277VAC / 30VDC
Mounting	35 mm DIN rail

Environmental Specifications

Temperature	Operating : -40 to 85°C
Humidity (non-condensing)	98% RH
Weight	RLYMD-1-S4-1CO-24VDC : 210gms RLYMD-2-S8-1CO-24VDC : 400gms

Dimensions (in mm)

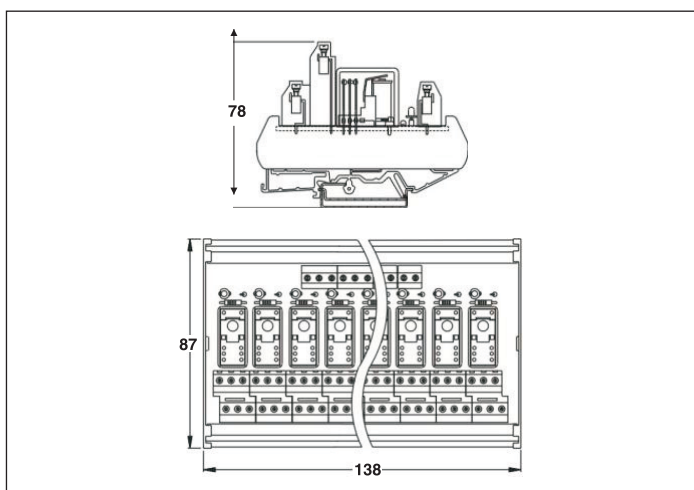

Ordering Information

Product Code	Description	Certification
RLYMD-1-S4-1CO-24VDC	Relay Module – 4 Channel 1 Change Over	CE RoHS
RLYMD-2-S8-1CO-24VDC	Relay Module – 8 Channel 1 Change Over	CE RoHS