



48 x 48mm

**Features :**

- ON delay / Interval
- 12 time ranges
- Universal supply voltage
- LED indications : Power ON, Relay ON
- Compact size

Certifications :

**Display specifications**

LED indications	Power ON, Relay ON
-----------------	--------------------

**Input specifications**

Accuracy	Setting : $\pm 5\%$ of F.S. Repeat : $\pm 0.5\%$ or 50msec (F.S. = Full scale)
----------	---

**Output specifications**

Relay contact	2 C/O SPDT
Contact rating	5A @ 250V AC / 24V DC, resistive

**Functional specifications**

Modes	ON delay / Interval
Time ranges	0 - 1sec / min / hr 0 - 3sec / min / hr 0 - 10sec / min / hr 0 - 30sec / min / hr
Resolution	0.1sec
Reset	On interruption of power; Reset time < 100 msec

**Auxiliary supply specifications**

Supply voltage	20 to 240V AC (50 / 60Hz) 12 to 240V DC
Power consumption	2VA max


**Environmental specifications**

Temperature	Operating : 0°C to 50°C (32 to 122°F) Storage : -20°C to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH


**Mechanical specifications**

Mounting	Plug / Panel mount
Weight	100 gms


**Dimensions**

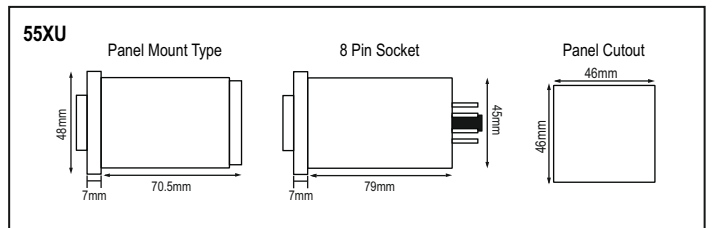

**Terminal connections**

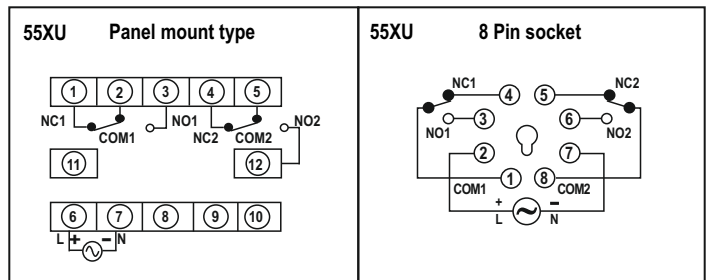

**Timing diagram**

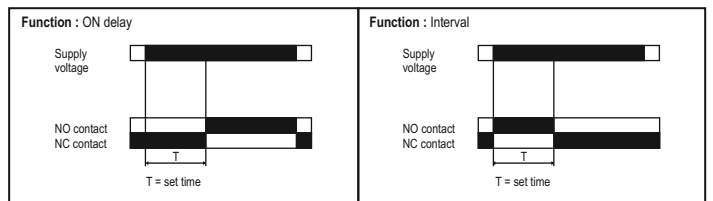

**Ordering information**

Product code	Supply voltage	Certification
55XU-P8	20 to 240V AC, 12 to 240V DC	
55XU-T	20 to 240V AC, 12 to 240V DC	