

Solid State Relay

Panel Mount - AC Input & AC Output Single Phase

SELEC[®]
Creating Best Value




RSS SERIES

- Output current of 25 and 40 Amps
- Output voltage of 24-330V and 48-480VAC
- Control voltage of 90-280VAC
- Integrated IP20 touch safe removable cover
- Input status indicator - LED
- Cost-effective solution

Product selection-Zero crossing

| Product name | RSS-TA1A125ZP | RSS-TA1A140ZP | RSS-TA1A225ZP | RSS-TA1A240ZP | RSS-TA1A225ZPL | RSS-TA1A240ZPL |
|--------------------|---------------|---------------|---------------|---------------|----------------|----------------|
| Rated load current | 25A | 40A | 25A | 40A | 25A | 40A |
| Output voltage | 24-330VAC | 24-330VAC | 48-480VAC | 48-480VAC | 48-480VAC | 48-480VAC |
| Control voltage | 90-280VAC | 90-280VAC | 90-280VAC | 90-280VAC | 90-280VAC | 90-280VAC |
| Transient voltage | 800 | 800 | 800 | 800 | 1200 | 1200 |

NOMENCLATURE

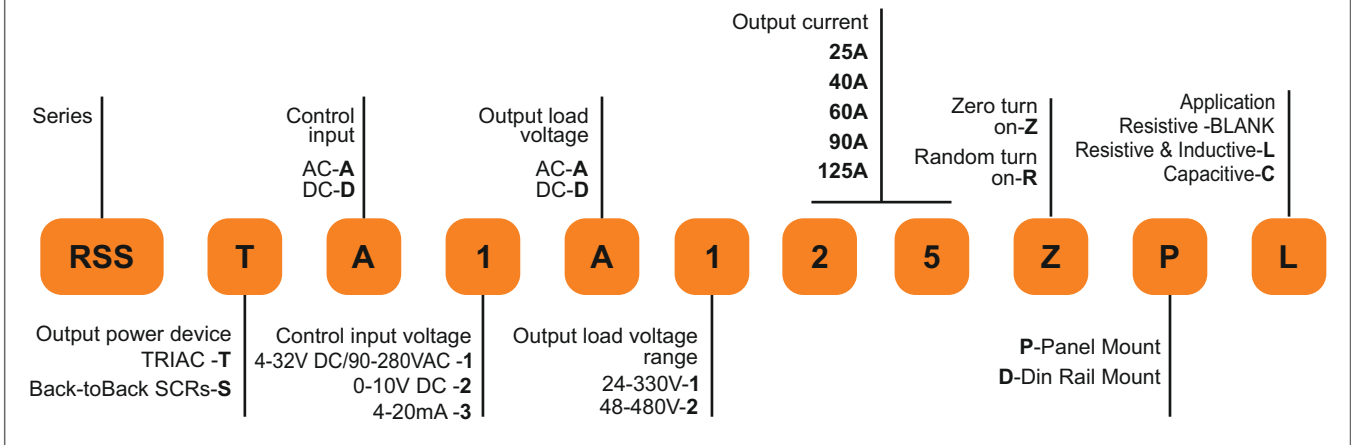

1 : Input Specification

| Description | |
|--------------------------------------|---------------|
| Control voltage range | 90-280V AC |
| Control current range | 7-20mA |
| Nominal input impedance | 2k ohm |
| Pick up voltage | 90V AC |
| Drop out voltage | 45V AC |
| Maximum response time pick up | ½ cycle+1 sec |
| Maximum response time drop up | ½ cycle+1 sec |
| Max reverse voltage | 40VDC |
| Zero crossing turn on | Available |
| Reverse voltage Protection | Available |
| LED indicator showing relay ON state | Available |

2 : Output Specification

| Description | RSS-TA1A125ZP | RSS-TA1A140ZP | RSS-TA1A225ZP | RSS-TA1A240ZP | RSS-TA1A225ZPL | RSS-TA1A240ZPL |
|---|---------------|---------------|---------------|---------------|----------------|----------------|
| Maximum Load current (Arms) | 25 | 40 | 25 | 40 | 25 | 40 |
| Minimum Load Current [mArms] | 50 | 50 | 50 | 50 | 50 | 50 |
| Min/Max Operating Voltage (Vrms) | 24-330 | 24-330 | 48-480 | 48-480 | 48-480 | 48-480 |
| Transient voltage (Vpk) | 800 | 800 | 800 | 800 | 1200 | 1200 |
| Maximum off state leakage current @ Rated voltage (mArms) | 10 | 10 | 10 | 10 | 10 | 10 |
| On state voltage drop @ Rated current (Vrms) | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| Minimum off state dv/dt @ maximum rated voltage (V/usec) | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| 1 Second surge current (A _{pk} . Ta=25 °C) 50Hz | 100 | 150 | 100 | 150 | 100 | 150 |
| Maximum 1 cycle surge current Typ @ 50Hz (Arms) | 250 | 400 | 250 | 400 | 250 | 400 |
| Thermal Resistance Junction to Case (R _{jc}) [°C/W] | 0.8 | 0.9 | 0.8 | 0.9 | 0.8 | 0.9 |
| Maximum 1/2 Cycle I ² t for Fusing @ 50 Hz (min. / typical) [A ² sec] | 340 | 800 | 340 | 800 | 340 | 800 |
| Minimum Heat Sink for Rated Current @ 40°C [°C/W] | 1 | 1 | 1 | 1 | 1 | 1 |

3 : General Specification



| Description | RSS-TA1A125ZP | RSS-TA1A140ZP | RSS-TA1A225ZP | RSS-TA1A240ZP | RSS-TA1A225ZPL | RSS-TA1A240ZPL |
|---|---|---------------|---------------|---------------|----------------|----------------|
| Dielectric Strength, Input/Output to Ground | 2500 Vrms | 4000 Vrms | 2500 Vrms | 4000 Vrms | 2500 Vrms | 4000 Vrms |
| Dielectric Strength, Input to Output | 4000 Vrms | | | | | |
| Minimum Insulation Resistance | 100 MΩ (at 500 VDC) | | | | | |
| Maximum Capacitance, Input/Output | 0.8pF | | | | | |
| Ambient Temperature | Operating: -30°C to 80°C Storage: -30°C to 100°C | | | | | |
| Ambient Humidity | 93% non-condensing | | | | | |
| Heat sink Thermal Resistance: | 1°C/W | | | | | |

4 : Housing Specification



| | |
|----------------------------|------------------------|
| Dimensions (Lx Wx H) (mm) | 44.5x 57.5x 27.3 |
| Weight | 87.2 g approx |
| Baseplate | Aluminum |
| Material | Glass filled polyester |
| Mounting Type | Panel mount |
| LED input Status Indicator | Red |

5 : Circuit Block Diagram


RSS Series

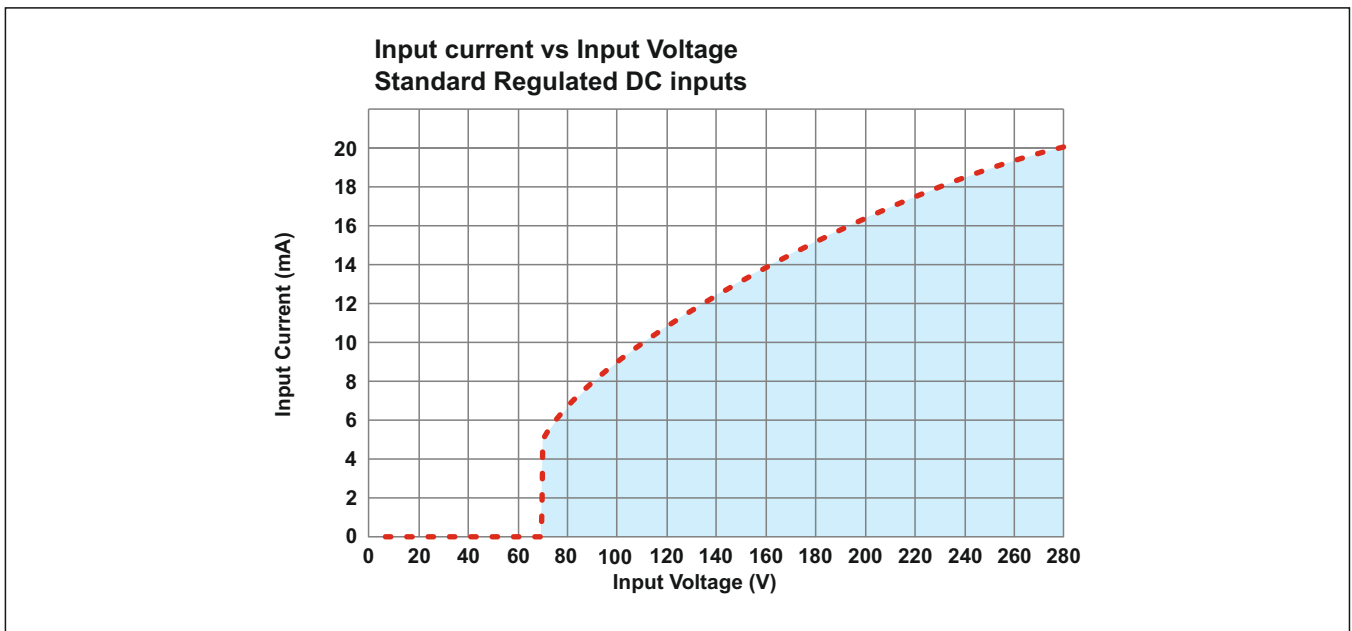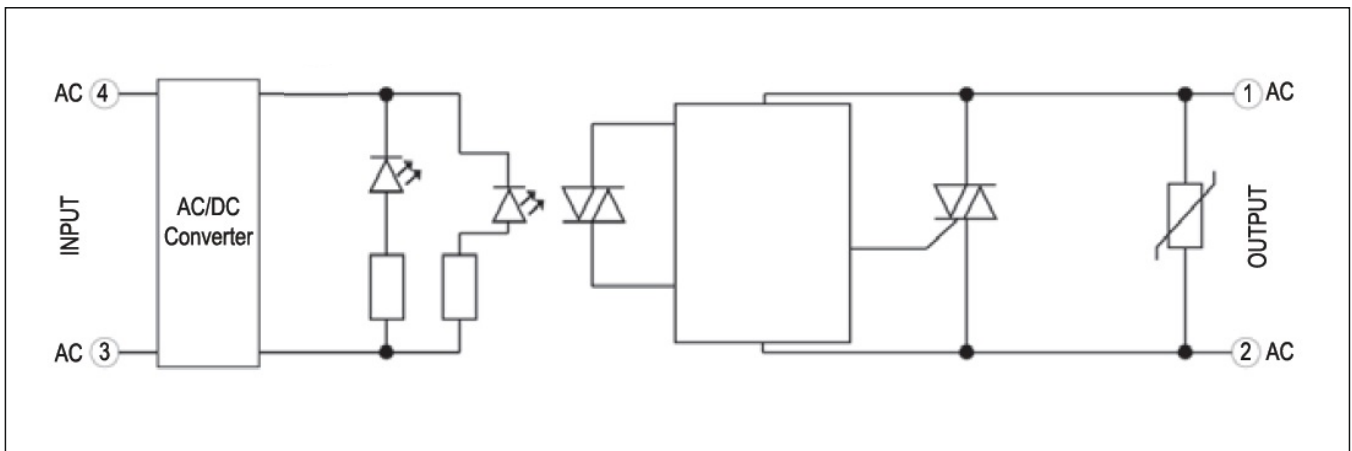


6 : Surge Current Information

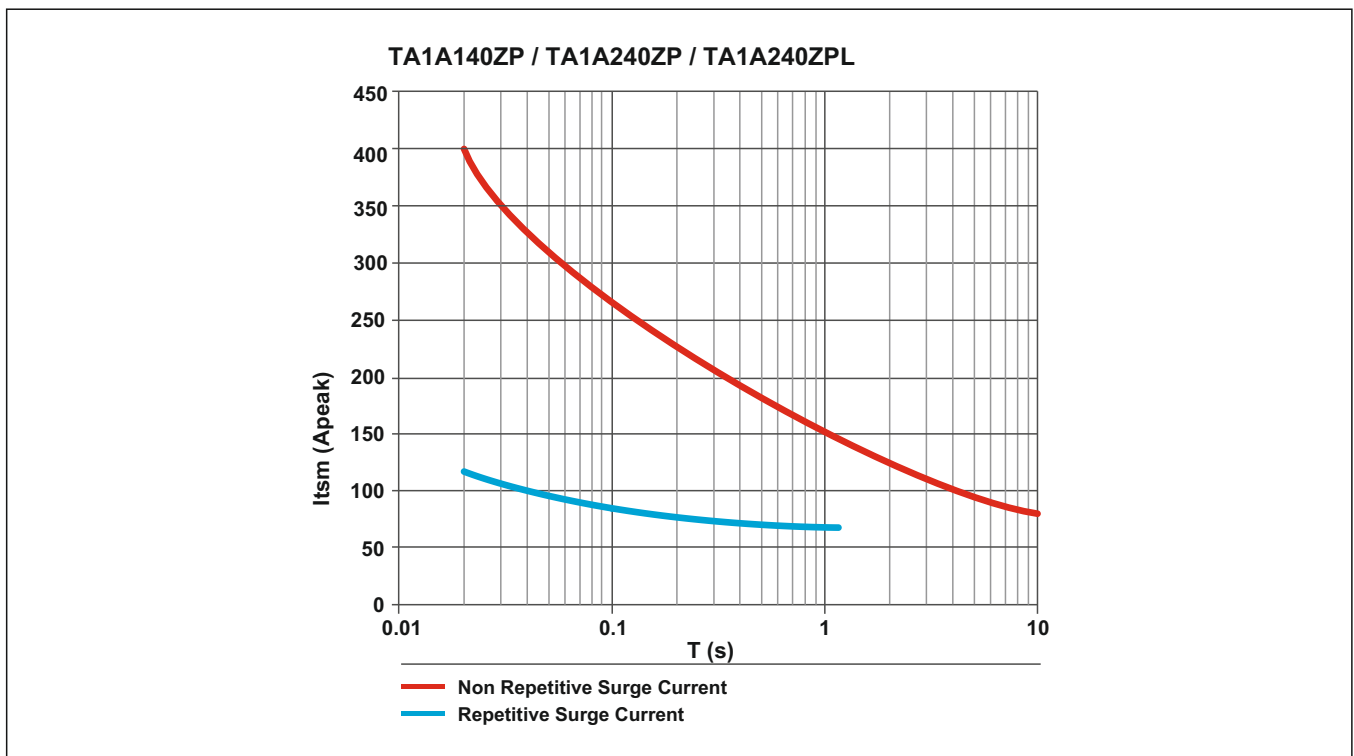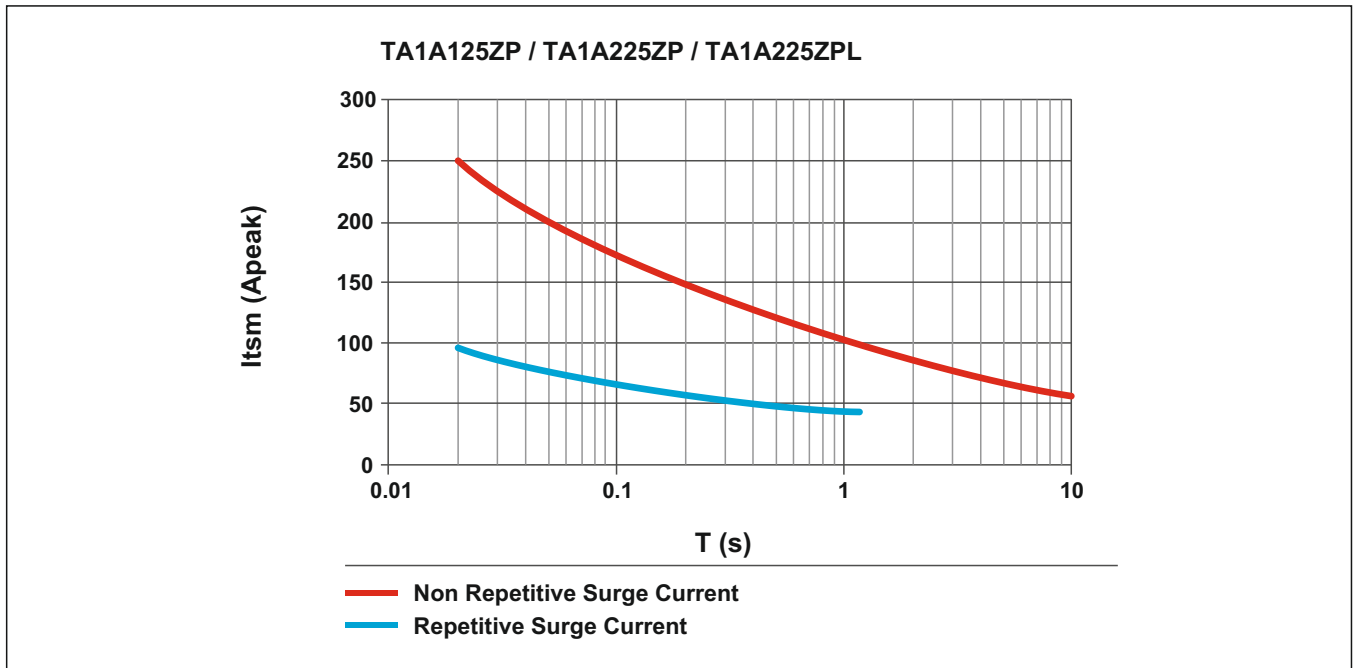


7 : Thermal Derating Curves

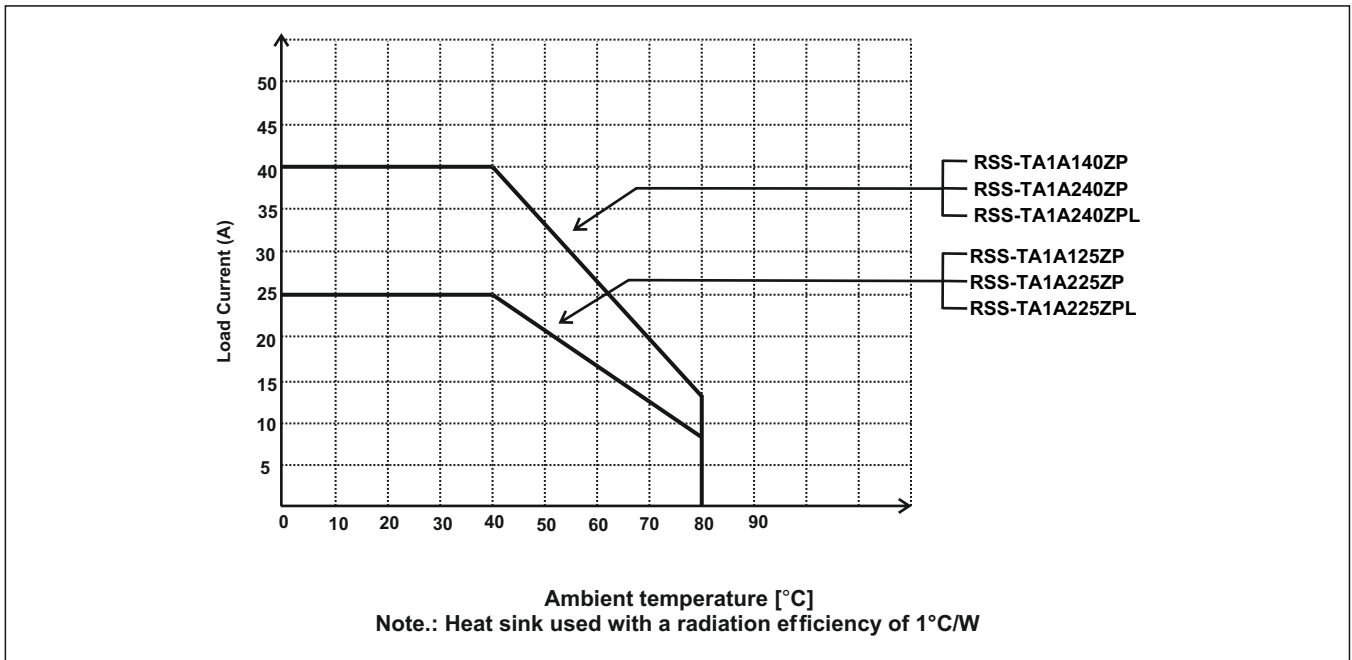

8 : Wiring

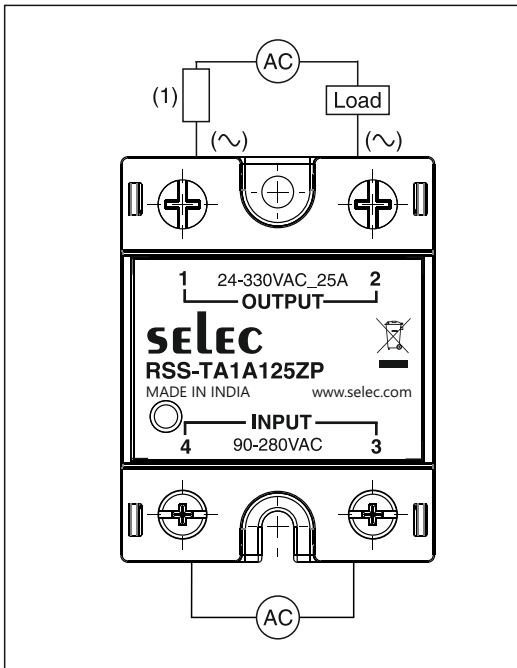

9 : Dimension (mm)

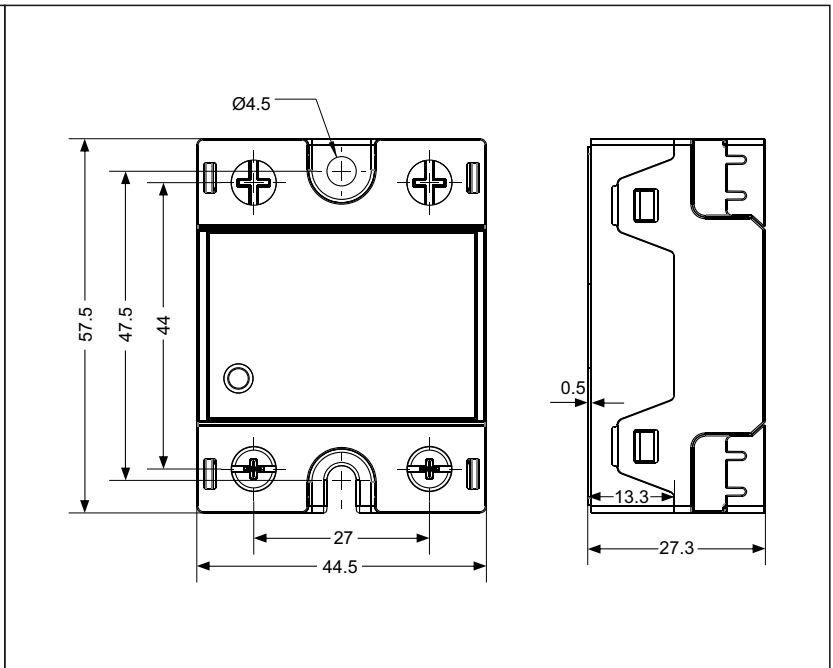

10 : Tightening Torque

| Screw Size | Wire Size (Solid) | Tightening Torque |
|---------------------------|--|-------------------|
| M4 Screws (control input) | 18..14 AWG (0.75..2.5 mm ²) 2 x 18..14 AWG (0.75..2.5 mm ²) | 1.2 N-m |
| M5 Screws (load output) | 16..8 AWG (1.5..10 mm ²) 2 x 16..8 AWG (1.5..10 mm ²) | 2.0 N-m |