



70 x 90mm

## Features :

- Under, Over, Dual speed
- 2 Relay Output
- RPH, RPM, RPS ranges
- Scalable Input, Auto ranging

Certification :

### Display Specifications

Display	4 Digits, 7 Segment LED Height of Display : 11mm
LED Indication	R1 : Relay 1 ON for Under speed R2 : Relay 2 ON for Over speed

### Input Specifications

Sensor Type	NPN
Input Type	5 to 30V DC from proximity switches, encoders, solid state devices, relays, potential free contacts
Set Points	2 (Under & Over Speed Set Points)
Accuracy	Rate : 0.05%
Scale Factor	0.001 to 9.999 x 10 <sup>n</sup> , n= -3, -2, -1, 0, 1, 2

### Functional Specifications

Range	Auto ranging, RPH, RPM or RPS
Operating Modes	Under-speed, Over-speed, Dual-speed
Memory Retention	10 years

### Output Specification

Relay Contact	2 C/O SPDT
Contact Rating	5A @ 230V AC / 24V DC

### Auxiliary Supply Specifications

Supply Voltage	90 to 270V AC / DC
----------------	--------------------


### Environmental Specifications

Temperature	Operating : 0 to 55°C Storage : -20 to 75°C
Humidity (non - condensing)	95% RH
Protection	IP20


### Mechanical Specifications

Mounting	Din Rail
Weight	196gms

### Dimensions

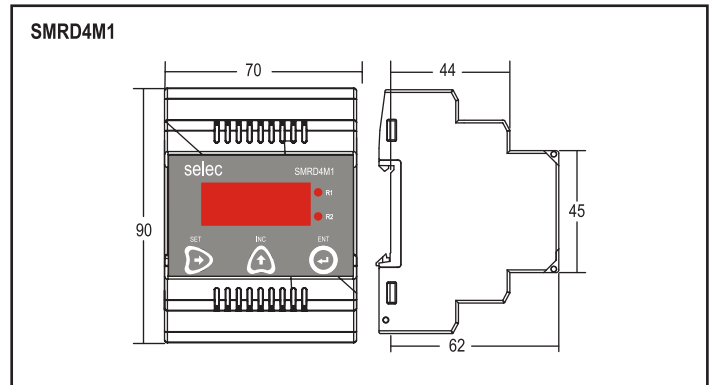

### Terminal Connections

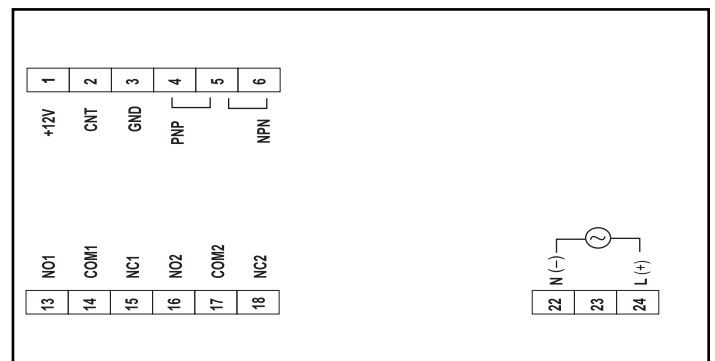

## Compliance

Applicable EMI / EMC Standards		
Product Standard		
Category	Reference Standards	Testing Level
Electrostatic Discharge	IEC 61000-4-2	Level-3
Electrical Fast Transient / Burst	IEC 61000-4-4	Level-3
Electromagnetic Field	IEC 61000-4-3	Level-3
Surge	IEC 61000-4-5	Level-3
Conducted RF	IEC 61000-4-6	Level-2
Rated Power Frequency	IEC 61000-4-8	Level-4
Voltage Dip / Short Interruptions	IEC 61000-4-11	Level-3
Conducted Emissions	CISPR-11	Class-B
Rated Emissions	CISPR-22	Class-A
Emission & Immunity	IEC 61326-1	
Safety	IEC 61010-1	
PFMF (Passing criteria)	IEC 61000-4-8	Class A

## Ordering Information

Product Code	Supply Voltage	Certification
SMRD4M1-2-U-CE	90 to 270V AC/DC	CE