



**Features:**

- 4 digit time interval meter
- Range : Auto ranging, Fixed ranges

**Technical Specifications**

**Input Specifications**

Display	7 segment LED; Height: 0.5"
Digits	4 digits
Start Input	Potential free contact, 3 to 30 VDC from solid state devices
Accuracy	0.05%

**Functional Specifications**

Modes	Contact type, Stop watch, Pickup timer, drop off timer, Pick up/drop off timer
Time Ranges	a) Autoranging: .0001 to 9999 sec b) Fixed ranges: .9999, 9.999, 99.99, 999.9,9999 sec
Counting Direction	Up
Reset	Front, Remote, Auto Reset (programmable)
Sensor Supply	12 VDC (±10%) @ 30 mA (short circuit protected)



**Supply Voltage**

Supply Voltage	90 to 270V AC/DC (AC: 50 / 60Hz)
----------------	----------------------------------


**Environmental Specifications**

Temperature	Operating: 0 to 50°C Storage: -5 to 50°C
Humidity (non-condensing)	95% RH
Weight	190 gms


**Dimensions**



**Panel Cutout**



**Terminal Connections**

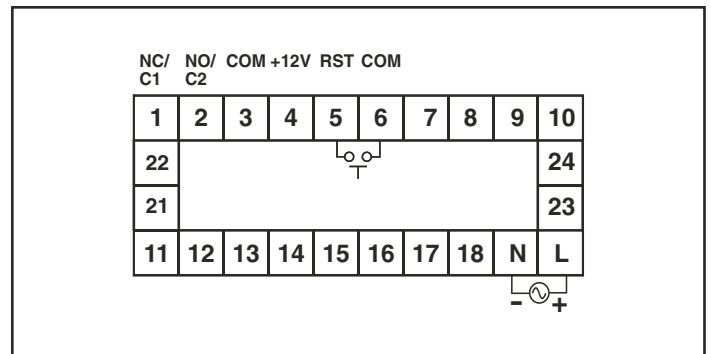

**Ordering Information**

Part No.	Supply Voltage
TI103C	90 to 270V AC/DC