OPS2x3-40 | OPEN FRAME POWER SUPPLIES _____ SELEC





Features:

- 3 x 2 x 1.16 Inches Form Factor
- **40 Watts Convection**
- No Load Power < 0.5 W
- 40°C to + 70°C Operating Temperature
- Efficiencies up to 86 %
- Class II Option Available
- Medical (BF) Safety Approvals
- Approved to Household, ITAV and Medical Standards

SPECIFICATIONS:

| MODEL | | OPS2x3-40-05 | OPS2x3-40-12 | OPS2x3-40-15 | OPS2x3-40-24 | OPS2x3-40-48 | |
|-------------|----------------------------|---|-------------------------|---------------------------|---------------|---------------|--|
| | NOMINAL DC VOLTAGE | 5 V | 12 V | 15 V | 24 V | 48 V | |
| | RATED CURRENT (CONVECTION) | 5 A | 3.34 A | 2.67 A | 1.67 A | 0.84 A | |
| | RATED CURRENT (FORCED AIR) | NA | NA | NA | NA | NA | |
| | RATED POWER (CONVECTION) | 25 W | 40 W | 40 W | 40 W | 40 W | |
| | RATED POWER (FORCED AIR) | NA | NA | NA | NA | NA | |
| | RIPPLE & NOISE (Max) | < 1.5 % of Vout | < 1 % of Vout | < 1 % of Vout | < 1 % of Vout | < 1 % of Vout | |
| | SET POINT ACCURACY | 5.1 V ± 2 % | 12.1 V ± 2.5 % | 15.1 V ± 2.5 % | 24.1 V ± 3 % | 48.1 V ± 3 % | |
| OUTPUT | LINE REGULATION | ± 0.5 % | | | | | |
| | LOAD REGULATION | ± 1 % | | | | | |
| | TURN ON TIME | < 1 Sec @ 230 VAC & < 3 Sec @ 115 VAC, Full load | | | | | |
| | HOLD UP TIME | ≥ 60 ms @ 230 VAC & ≥ 10 ms @ 115 VAC, Full load | | | | | |
| | RISE TIME | < 100 ms | | | | | |
| | FAN OUTPUT | Not Available | | | | | |
| | TRANSIENT RESPONSE | Max excursion 5 % for step load change from 50 % to 100 % at 0.1 A / µsec slew rate, 50 % duty cycle, 50 / 60 Hz. Recovery time < 5 msec | | | | | |
| | VOLTAGE RANGE * | 90 - 264 VAC(127 - 370 VDC) Note: 90 - 305 VAC operation available on demand. | | | | | |
| | FREQUENCY RANGE | 47 - 63 Hz | | | | | |
| | EFFICIENCY @ 230V AC | Up to 81 % | Up to 83 % | Up to 83 % | Up to 85 % | Up to 86 % | |
| | AC CURRENT | 0.85 A @ 115 VAC; 0.45 A @ 230 VAC | | | | | |
| INPUT | POWER FACTOR | No active PFC is available | | | | | |
| | INRUSH CURRENT | < 60 Amps; Measured at 264 VAC, 25°C Ambient, Cold start | | | | | |
| | LEAKAGE CURRENT | < 300 uA; 264 VAC input | | | | | |
| | TOUCH CURRENT | | < 100 uA; 264 VAC input | | | | |
| | NO LOAD POWER CONSUMPTION | | | < 0.5 W; 115 VAC input | | | |
| | OVERLOAD | > 110 % of rated output current; Hiccup mode; Autorecovery type. | | | | | |
| PROTECTION | OVERVOLTAGE | > 6.5 VDC | >15 VDC | >18 VDC | >28.5 VDC | > 57 VDC | |
| PROTECTION | OVERVOLIAGE | | Hid | ccup mode; Autorecovery t | уре. | | |
| | OUTPUT SHORT CIRCUIT | Hiccup mode when output is shorted; Autorecovery type. | | | | | |
| | OPERATING TEMP | - 40°C to + 70°C; De-rate linearly above 50°C from 100 % load at 50°C to 50 % load at 70°C. Note: Only start up guaranteed at - 40°C with specification deterioration. | | | | | |
| | STORAGE TEMP | - 40°C to + 85°C | | | | | |
| ENVIRONMENT | COOLING | Natural convection cooled | | | | | |
| | HUMIDITY | 5 to 95 % RH, Non condensing | | | | | |
| | ALTITUDE | 2000 m | | | | | |
| | VIBRATION | Component: 10 ~ 500 Hz, 2 G 10 min. / 1 cycle, Period for 60 min. each along X, Y, Z axes | | | | | |

Note: *Although power supply will work for the specified DC input voltage range, UL approval is only for the specified AC input voltage range.

OPS2x3-40 | OPEN FRAME POWER SUPPLIES _____ SELEC



| MODEL | | OPS2x3-40-05 | OPS2x3-40-12 | OPS2x3-40-15 | OPS2x3-40-24 | OPS2x3-40-48 |
|-------------------------|--------------|--|--------------|--------------|--------------|--------------|
| DIELECTRIC WITHSTAND | TEST VOLTAGE | I/P to Earth: 1500 VAC, I/P to O/P: 4000 VAC, O/P to Earth: 1500 VAC | | | | |
| RELIABILITY | MTBF | > 650K hrs. as per MIL-HDBK-217F (25°C) | | | | |
| | DIMENSION | Overall: 3" x 2" x 1.16" (L x W x H); Height above PCB: 1" | | | | |
| MECHANICAL | WEIGHT | < 100 gms | | | | |
| | MOUNTING | | | Open Frame | | |


| Means of | Category | |
|----------------------|--|------------------|
| Primary to Secondary | 2 x MOPP (Means of Patient Protection) | |
| Primary to Earth | 1 x MOPP (Means of Patient Protection) | IEC 60601-1 Ed 3 |
| Secondary to Earth | 1 x MOPP (Means of Patient Protection) | |

Connectors details

| Ref Des | Description | Туре | Pin number | Function |
|------------------------|--------------------|---|------------|---------------|
| J1 | Input AC connector | Tyco: 640445-3; | 1 | AC Neutral |
| | | Mates with 647402-3; | 2 | Not connected |
| | | Pin: 3-647409-1 | 3 | AC Line |
| J2 Output DC connector | Output DC | Tyco: 640445-4; Mates with 647402-4; | 1, 2 | V1 Negative |
| | connector | Pin: 3-647409-1 | 3, 4 | V1 Positive |
| - | Earth* | Mounting holes marked with Earth Symbol | - | Earth |

Note: * All the mounting holes marked with Earth symbol must be Earthed.

Mechanical dimensions

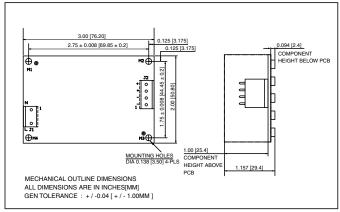


- **Note:**1. This open frame power supply should preferably be mounted horizontally on 4 metal stand-offs having diameter not more than 6 mm and height not less than 7 mm.

 2. Screws used to fix PCB on stand-offs should not have head diameter more than 6 mm.

 3. Washer used should not have diameter more than 6 mm.

De-rating curve

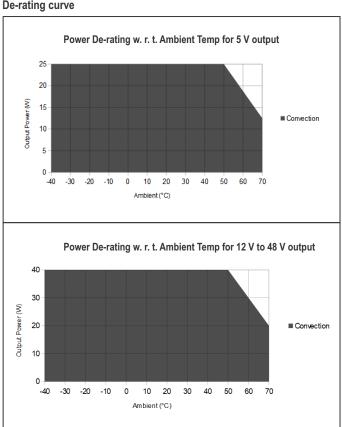

OPS2x3-40 | OPEN FRAME POWER SUPPLIES ____ SELEC



Compliance

| Applicable EMI / EMC Standards | | | | |
|-----------------------------------|--|--|--|--|
| Category | Reference Standards | Testing Level | | |
| Conducted Emission | CISPR32 | CLASS B | | |
| Radiated Emission | CISPR32 | CLASS A | | |
| Electrostatic Discharge | IEC 61000-4-2 | Level 4, Criteria A Level 3, Criteria A | | |
| Radiated Susceptibility | IEC 61000-4-3 | Level 3, Criteria B | | |
| Electrical Fast Transient / Burst | IEC 61000-4-4 | Level 3, Criteria A | | |
| Surge | IEC 61000-4-5 | Level 3, Criteria A | | |
| Conducted Susceptibility | IEC 61000-4-6 | Level 3, Criteria B | | |
| Power Frequency Magnetic Field | IEC 61000-4-8 | Level 4, Criteria A | | |
| Voltage Dips & Interruption | IEC 61000-4-11 | Criteria A & B | | |
| Safety | Approved to IEC / EN / UL 62368-1; IEC / EN 60601-1; IEC / EN 61558 | | | |

Ordering information

| Product Code | Description | Certification |
|---------------------|---|---------------|
| OPS2x3-40-05-A-1-CU | Open Frame Power Supply with 3 x 2 x 1.16" Form factor, 5 V / 5 A, 25 Watts with Convection Cooling | ROHS C SUUS |
| OPS2x3-40-12-A-1-CU | Open Frame Power Supply with 3 x 2 x 1.16" Form factor, 12 V / 3.34 A, 40 Watts with Convection Cooling | ROHS C SUS |
| OPS2x3-40-15-A-1-CU | Open Frame Power Supply with 3 x 2 x 1.16" Form factor, 15 V / 2.67 A, 40 Watts with Convection Cooling | ROHS C SUS |
| OPS2x3-40-24-A-1-CU | Open Frame Power Supply with 3 x 2 x 1.16" Form factor, 24 V / 1.67 A, 40 Watts with Convection Cooling | ROHS C SUS |
| OPS2x3-40-48-A-1-CU | Open Frame Power Supply with 3 x 2 x 1.16" Form factor, 48 V / 0.84 A, 40 Watts with Convection Cooling | ROHS C SUS |