

DIN 35mm

Features:

- 3Ø 3 Wire, 3Ø 4 Wire Input
- Monitors Under Voltage, Over Voltage, Under Frequency, Over Frequency, Phase Asymmetry, Phase Failure and Phase Sequence
- True RMS Measurement
- Power ON delay, Trip time delay and Recovery time delay
- Adjustable switching hysteresis
- Two separate alarm relays

Display Specifications

Туре	Digital
Display	Liquid Crystal Display
No of LED	3
No of Push Button	3

LED Indication

LED1 (Green)	Power ON
LED2 (Red)	Relay1 (Continuously ON after trip)
LED3 (Red)	Relay2 (Continuously ON after trip)

Input Specifications

ırış	out Specifications		
	Functions		
	Measurements	Under voltage, Over voltage, Under frequency, Over frequency, Phase asymmetry, Phase failure and Phase sequence	
	Time Setting	Power ON delay, Trip time delay and Recovery time delay	
	Alarm Indications	Trip	
	Latching	Selectable	
	Reset	Auto / Manual	
	Electrical Connection	3Ø - 3 wire, 3Ø - 4 wire	
	Measuring Range		
	(RMS Value)	280 to 600V AC (L - L) [for 3Ø - 3 wire]	
		160 to 300V AC (L - N) [for 3Ø - 4 wire]	
	Trip Settings		
	Under Voltage	280 to 600V AC (L - L) [for 3Ø - 3 wire]	
		160 to 300V AC (L - N) [for 3Ø - 4 wire]	
	Over Voltage	280 to 600V AC (L - L) [for 3Ø - 3 wire]	
		160 to 300V AC (L - N) [for 3Ø - 4 wire]	
	Under Frequency	45 - 65Hz	
	Over Frequency	45 - 65Hz	
	Phase Failure	Yes	
	Phase Sequence	Yes	
	Phase Asymmetry	5.0 - 99.9%	

Trip Time Settings	
Power ON Delay	2 - 99.9sec
Trip Time Delay	0-99.9sec
Recovery Time Delay	0-99.9sec
Response Time	<200ms
Hysteresis	
Voltage	1.0 - 99.9V
Frequency	0.2 - 2Hz
Asymmetry	2 - 20%
Resolution	
Voltage	1V
Frequency	0.1Hz
Accuracy	
Voltage	±1% of set value
Frequency	±0.3Hz
Time Setting Accuracy	±5% of setting ±200ms

Output Specifications

No. of Relays	2
Type of output (Relay1)	1C / O (SPDT)
Type of output (Relay2)	1C / O (SPDT)
Relay Rating	NO / 5A @ 250V AC NC / 3A @ 250V AC (res)

Auxiliary Supply Specifications

Supply Voltage	Self powered
Operating Range	280 - 600V AC (L - L) 160 - 300V AC (L - N)
VA Rating	30VA max.
Frequency	45 - 65Hz

www.selec.com


Environmental Specifications

Temperature	Operating Temperature : 0°C to 55°C Storage Temperature : -20°C to +70°C
Humidity (non-condensing)	95% RH
Pollution Degree	
For PCB	2
For Product	3
Degree of protection	IP20


Mechanical Specifications

Mounting	Din Rail
Weight	135 g
Conductor cross section (Solid)	1 x (0.5 to 4)Sq.mm
Conductor cross section sleeved (Stranded)	2 x (0.5 to 1.5)Sq.mm 1 x (0.5 to 2.5)Sq.mm
Screw tightening torque	0.5 NM


Dimensions

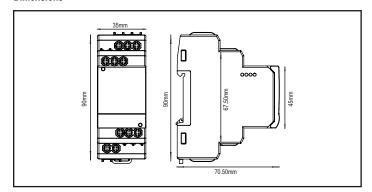

Terminal Connections

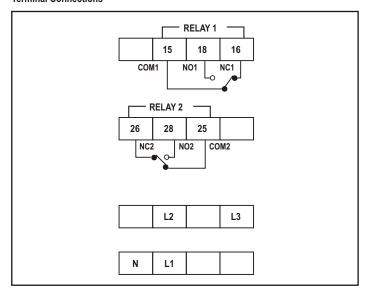

Timing Diagram

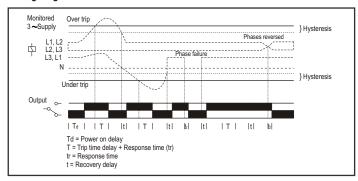

Ordering Information

Product Code	Operating Range	Certification
900VPR-2-300/600V	300-600V AC	_

vww.selec.com 2