Features:


Preset counter
Thumbwheel setting
Auto reset
Memory retention

72 x 72mm

Technical specifications

A distriction of Zeromont LED display
4 digits single 7 segment LED display
Relay ON
NPN/ PNP
Voltage pulse (5 to 30 VDC) from Proximity switches, Encoders, Solid state devices, Potential free contact
a) 30Hz, b) 5kHz
Front, Remote, Auto
Inbuilt, 12 VDC, 30mA
Relay: NO: 10A 250 VAC/ 28 VDC NO/ NC: 5A/ 5A 250 VAC/ 28 VDC
2X SPDT
ON delay/ Interval
9999 counts
Yes (selectable upto 7 sec)
1
Up
Yes (selectable)
90 to 270 VAC/ DC (50Hz or 60Hz)
Operating: 0 to 50°C Storage: - 5 to 50°C
95% RH
Panel mount
210gms


Terminal connections





DIP SW	FUNCTION SETTING	
1	Interval	
2	Auto Reset	
3	Non Over Run	
4,5,6	Auto Reset Time= 1sec	
7	Retention ON	
8	Slow Speed	

Dimensions (All are in mm)

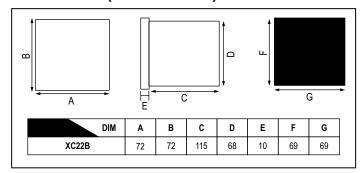

Ordering information

XC22B V2	90 to 270 VAC/ DC	