

# Features:

- Lowest cost, Single Function
- LED Indications : Power ON, Relay ON
- Finger safe Terminals

### **Display Specifications**

LED Indications Power ON, Relay ON
------------------------------------

#### **Input Specifications**

Accuracy	Setting: ± 5% of full scale.
	Repeat: ± 0.5% or 50msec

#### **Output Specifications**

Relay Contact	1 C/O SPDT
Contact Rating	5A @ 250V AC / 24V DC, resistive

# **Functional Specifications**

Modes	ON delay
Time Ranges	60sec
Reset	On power interruption Reset time < 100msec

# **Auxiliary Supply Specifications**

	Supply Voltage	230V AC, 415V AC (50 / 60 Hz)
--	----------------	-------------------------------


#### **Environmental Specifications**

Temperature	Operating : 0 to 50°C Storage : -5 to 50°C
Humidity (non - condensing)	95% RH


## **Mechanical Specifications**

Mounting	DIN Rail Mount
Weight	100gms


#### **Dimensions**

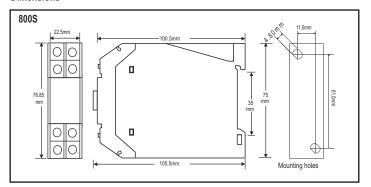

### **Terminal Connections**

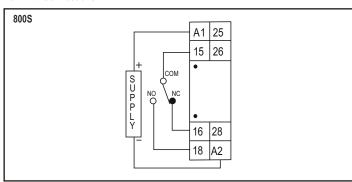

# **Timing Diagram**

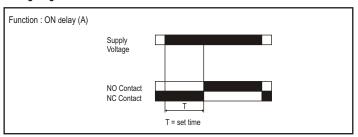

# **Ordering Information**

Product Code	Supply Voltage
800S-1-ON-60S-230	230V AC
800S-1-ON-60S-415	415V AC