

DIN 22.5mm

Features:

• Forward - Pause - Reverse Timer

• LED indications : Relay 1 ON, Relay 2 ON

Display specifications

| LED indications | Relay 1, Relay 2 | Relay 1, Relay 2 | |
|----------------------|-------------------------------|------------------|--|
| Input specifications | | | |
| Accuracy | Setting : ± 5% of full scale. | | |

Repeat : \pm 0.5% or 50 ms whichever is greater

Output specifications

| Relay contact | 1 C/O each for Forward & Reverse |
|----------------|----------------------------------|
| Contact rating | 5A @ 250V AC / 24V DC, Resistive |

Functional specifications

| Modes | Forward-Pause-Reverse |
|-------------|---|
| Time ranges | 1 / 2/ 4 / 8min (ON time) 10 / 20 / 40 / 80sec (Pause time) |
| Reset | On power interruption Reset time > 100msec |

Auxiliary supply specifications

| Supply voltage | 20 to 240V AC (50 / 60Hz) 12 to 240V DC | |
|----------------|--|--|
| | | |


Environmental specifications

| Temperature | Operating: 0 to 50°C Storage: -20 to 75°C |
|-----------------------------|--|
| Humidity (non - condensing) | 95% RH |


Mechanical specifications

| Mounting | DIN rail |
|----------|----------|
| Weight | 100 gms |


Dimensions (All are in mm)

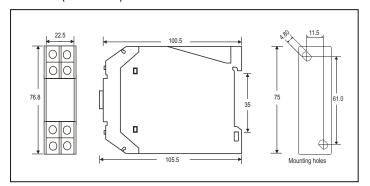

Terminal connections

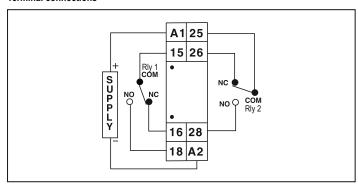

Timing diagram

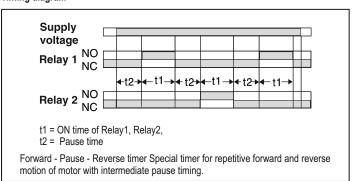

Ordering information

| Product code | Supply voltage | Certification |
|--------------|--------------------------------|---------------|
| 800XMR | 20 to 240V AC 12 to 240V DC | |