



FEATURES

- Accepts Sensor Inputs : Thermocouple / RTD
Analog inputs : mV, Current, Voltage.
- High Indication Accuracy : ± 0.25%.
- Sensor Break Detection.
- 24 VDC Sensor Supply.
- Supply Voltage : 85 to 270V AC / DC
24V DC

SPECIFICATIONS

DISPLAY

4-digit (7 segment LED) 0.5" height
Display Messages:
"Or" - Appears when
1) Measurement exceeds display scaling range (9999)
2) Open sensor is detected.
"rE" - Appears when
1) Measurement is below display scaling range (-1999)
2) Sensor reverse condition occurs.

POWER SUPPLY

85 to 270V AC / DC (AC: 50/60 Hz), 4VA
24V DC, 4VA

SETTINGS Via three keys on front panel.

MEMORY

Nonvolatile EEPROM retains all programmable parameters and values.

MAIN SENSOR INPUT

Thermocouple inputs
J : -200 to 750°C
K : -200 to 1350°C
T : -200 to 400°C
R : 0 to 1750°C
S : 0 to 1750°C
RTD input (2 wire or 3 wire)
PT100 : -100 to 850°C
Signal Inputs
mV : -5 to 56 mV
Voltage : 0 to 10 VDC
Current : 0 to 20 mA

SENSOR SUPPLY

24 VDC (30mA) to power the sensors

INDICATION ACCURACY

Temperature : 0.25% of Span ±1°C
(After 20min. Warmup)

ISOLATION BREAKDOWN RATINGS

AC line with respect to all inputs and outputs :
2000 Volts

ENVIRONMENTAL CONDITIONS

Operating Range : 0 to 50°C
Storage Range : -20 to 75°C
Humidity : 85% max.

CONNECTION

Wire clamping screw terminal

WEIGHT

220 grams

SAFETY SUMMARY

All safety related codifications, symbols and instructions that appear in this operating manual or on the equipment must be strictly followed to ensure the safety of the operating personnel as well as the instrument.

If the equipment is not handled in a manner specified by the manufacturer it might impair the protection provided by the equipment.

CAUTION : Read complete instructions prior to Installation and operation of the unit.

CAUTION : Risk of electric shock.

WIRING GUIDELINES

CAUTION :
1. To prevent the risk of electric shock power supply to the equipment must be kept OFF while doing the wiring arrangement.

2. Wiring shall be done strictly according to the terminal layout with shortest connections. Confirm that all connections are correct.

3. Use lugged terminals to meet M3 screws.

4. To eliminate electromagnetic interference use of short wire with adequate ratings and twists of the same in equal size shall be made.

5. Cable used for connection to power source, must have a cross section of 1mm² or greater. These wires shall have insulation capacity made of at least 1.5KV.

MAINTENANCE

1. The equipment should be cleaned regularly to avoid blockage of ventilating parts.
2. Clean the equipment with a clean soft cloth. Do not use isopropyl alcohol or any other cleaning agent.

INSTALLATION GUIDELINES

CAUTION :
1. This equipment, being built-in-type, normally becomes a part of main control panel and in such case the terminals do not remain accessible to the end user after installation and internal wiring.

2. Conductors must not come in contact with the internal circuitry of the equipment or else it may lead to a safety hazard that may in turn endanger life or cause electrical shock to the operator.

3. Circuit breaker or mains switch must be installed between power source and supply terminals to facilitate power 'ON' or 'OFF' function. However this switch or breaker must be installed in a convenient position normally accessible to the operator.


CAUTION :

1. The equipment shall not be installed in environmental conditions other than those mentioned in this manual.
2. Fuse Protection : The equipment does not have a built-in-type fuse. Installation of external fuse of rating 75VAC/1 Amp for electrical circuitry is highly recommended.
3. Thermal dissipation of equipment is met through ventilation holes provided on chassis of equipment. Such ventilation holes shall not be obstructed else it can lead to a safety hazard.
4. The output terminals shall be strictly loaded to the manufacturer specified values/range.

MECHANICAL INSTALLATION

For installing the controller

1. Prepare the panel cutout with proper dimensions as shown (in mm)

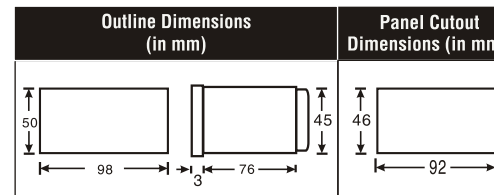

2. Remove Clamp from the controller and push the controller into the panel cutout. Secure the controller in its place by pushing the clamp on rear side.
3. For proper sealing, tighten the screws evenly with required torque.

CAUTION :

The equipment in its installed state must not come in close proximity to any heating sources, caustic vapors, oils, steam or other unwanted process by-products.

EMC Guidelines :

1. Use proper input power cables with shortest connections and twisted type.
2. Layout of connecting cables shall be away from any internal EMI source.

LOAD CONNECTIONS

1. For load current less than 0.5A




Fig.01

2. For bigger loads, use interposing relay / contactor

- 1) Snubber Part No.: APRC - 01.
 - 2) MOV Part No.: AP-MOV - 03.
- Note :** For inductive loads, use of snubber and MOV as shown above, is recommended.




Fig.02


ELECTRICAL PRECAUTIONS DURING USE

Electrical noise generated by switching of inductive loads can create momentary disruption, erratic display, latch up, data loss or permanent damage to the instrument. To reduce noise:


- a) Use of MOV across supply of temperature controller & snubber circuits across loads are Recommended
- b) Use separate shielded wires for inputs.

TERMINAL CONNECTIONS

1) 230V SUPPLY

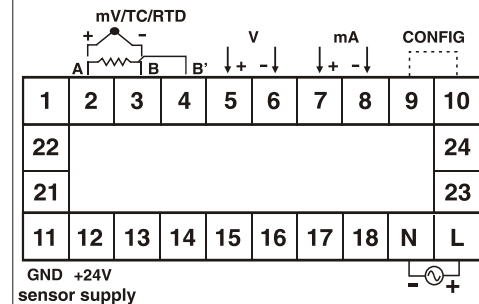

2) 24V SUPPLY

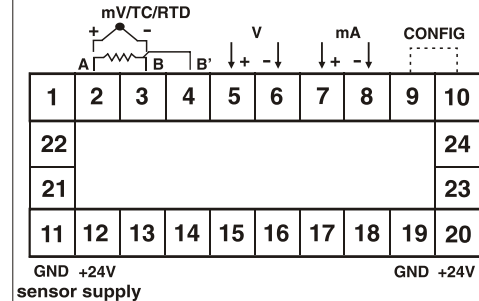

CONFIGURATION SCHEME

METHOD 1 :

1. Short terminals 9 and 10.
 2. Turn Power ON.
 3. Remove the shorting.
- Unit will directly enter into programming mode.

METHOD 2 :

Press **D** for 3 sec to enter into Programming

| Key press | Display | Description |
|-----------|---------|-------------|
|-----------|---------|-------------|

1. Lock code for program entry

Factory setting :

NOTE : This parameter will not be prompted if programming is entered using METHOD 1.

(Display **CODE** for 1 second)
0
 Press **▲** + **▲** key and program the lock code as **85**

| Key press | Display | Description |
|---|--------------|-----------------------|
| 2. Press ▲ to program Sensor type Factory setting: 0 | | |
| (Display INPT for 1 second) | | |
| Press ▲ | J | J : -200 to 750°C |
| Press ▲ | K | K : -200 to 1350°C |
| Press ▲ | T | T : -200 to 400°C |
| Press ▲ | R | R : 0 to 1750°C |
| Press ▲ | S | S : 0 to 1750°C |
| Press ▲ | PT100 | PT100 (-100 to 850°C) |
| Press ▲ | mV | mV : 0 to 56 mV |
| Press ▲ | CURR | Current |
| Press ▲ | VOLT | Voltage |

| 3. Press ▲ to program Resolution. Factory setting: 1 | | |
|---|--------------|--|
| (Display RESL for 1 second) | | |
| Press ▲ | 1 | TC/RTD: 1 / 0.1 °C Analog input: 1 / 0.1/0.01/0.001 (Decimal point position) |
| Press ▲ | 0.1 | |
| Press ▲ | 0.01 | |
| Press ▲ | 0.001 | |

| 4. Press ▲ key to select Temperature unit. NOTE: Valid for TC / RTD inputs Factory setting: °C | | |
|--|-----------|--|
| (Display TEMP for 1 second) | | |
| Press ▲ | °C | |
| Press ▲ | °F | |

| 5. Press ▲ key to program Display scaling point low Factory setting: 0 NOTE: Valid for analog inputs (mV, current, voltage) | | |
|---|----------|--|
| (Display DSCL for 1 second) | | |
| Press ▲ | 0 | Range: -1999 to DSCH (display as per decimal point selected.) |

| Key press | Display | Description |
|---|-------------|---|
| 6. Press ▲ key to program Input scaling point low Factory setting: 000 NOTE: Valid for analog inputs (mV, current, voltage) | | |
| (Display ISCL for 1 second) | | |
| Press ▲ | 0.00 | Range: 0.0mA/V/mV to ISCH (default value changes as per analog input selected) |

| 7. Press ▲ key to program Display scaling point high Factory setting: 9999 NOTE: Valid for analog inputs (mV, current, voltage) | | |
|---|-------------|---|
| (Display DSCH for 1 second) | | |
| Press ▲ | 9999 | Range: DSCL to 9999 (display as per decimal point selected.) |

| 8. Press ▲ key to program Input scaling point high Factory setting: 2000 NOTE: Valid for analog inputs (mV, current, voltage) | | |
|---|-------------|---|
| (Display ISCH for 1 second) | | |
| Press ▲ | 2000 | Range : ISCL to 20.00mA/10.00V/56mV (default value changes as per analog input selected) |

| 9. Press ▲ key to select Reverse scaling Factory setting: 0 NOTE: Valid for analog inputs (mV, current, voltage) | | |
|--|----------|--|
| (Display REU for 1 second) | | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |

| 10. Press ▲ key to program Filter time constant Factory setting: 1 | | |
|---|----------|---------------------------|
| (Display FILT for 1 second) | | |
| Press ▲ | 1 | Range : OFF, 1 to 99 sec. |

| 11. Press ▲ key to program PV Bias Factory setting: 0.0 | | |
|--|------------|--|
| (Display BIAS for 1 second) | | |
| Press ▲ | 0.0 | Range : -99.9 to +99.9 °C (Fixed 0.1 resl for TC/RTD & 1 unit for analog input) |

| Key press | Display | Description |
|---|----------|-------------|
| 12. Press ▲ key to select reset all Factory setting: 0 | | |
| (Display RST for 1 second) | | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |
| Press ▲ | 7 | |
| Press ▲ | 8 | |
| Press ▲ | 9 | |
| Press ▲ | 0 | |
| Press ▲ | 1 | |
| Press ▲ | 2 | |
| Press ▲ | 3 | |
| Press ▲ | 4 | |
| Press ▲ | 5 | |
| Press ▲ | 6 | |